



STEP 1 ATTACHING PROTECTIVE CLAMP

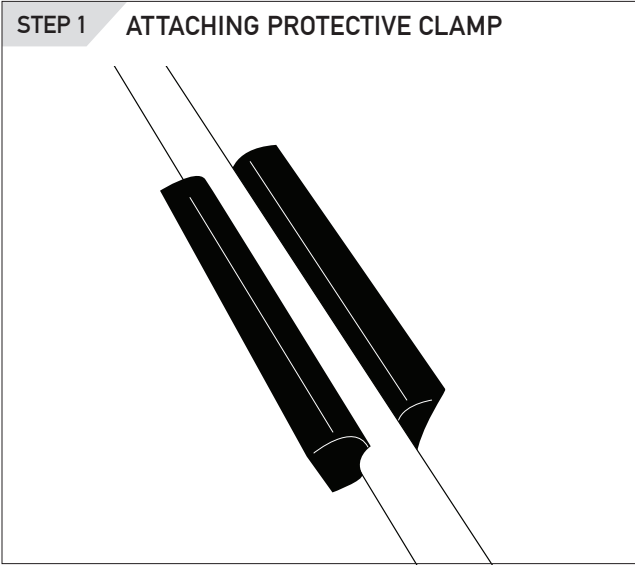


Attach the protective rubber shaft clamp onto the shaft. Place approximately 5 inches below the bottom of the grip.

STEP 2 SECURING YOUR CLUB

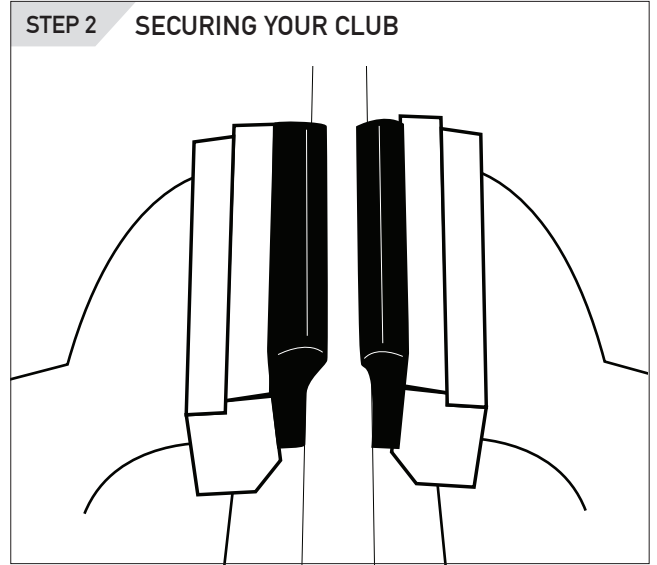


Secure the club into your vise. For alignment purposes, make sure that the toe of the club is pointing upward or the grip's logo is also in the up position. Tighten with moderate force. Avoid over-tightening on graphite shafts to prevent potential damage to the shaft.

STEP 3 REMOVING EXISTING GRIP*

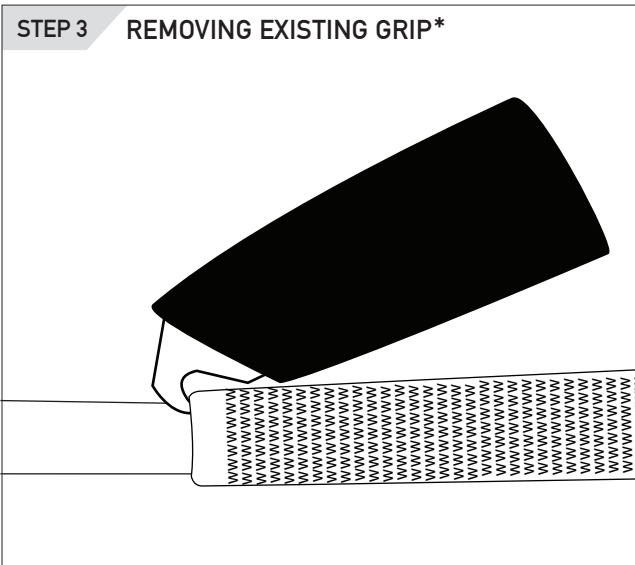

If the club is already gripped, remove the grip at this time. Using a hooked knife blade, cut the grip starting from the lower end of the grip and work toward the butt end. After the grip is cut, peel the grip from the shaft. To remove the old grip tape, heat the tape for 20 seconds with a heat gun and peel the tape from the butt end of the shaft.


STEP 4 APPLYING GRIP TAPE

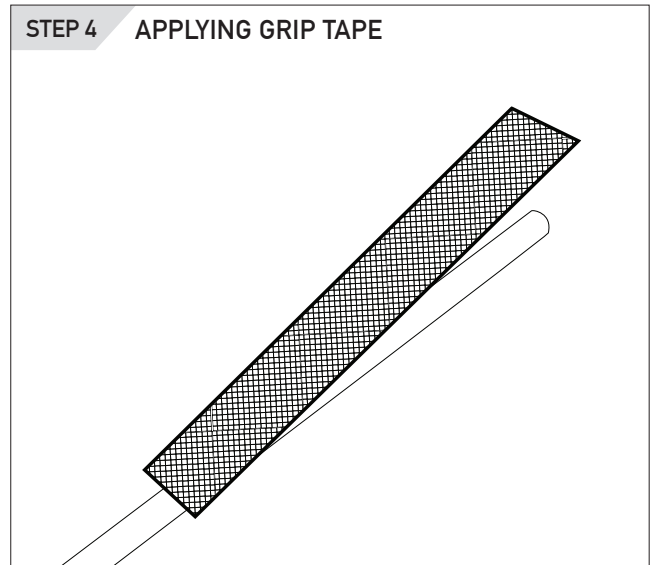

Apply the tape onto the shaft. Peel the back liner off of the individual strip of tape. Apply the sticky side down length-wise onto the shaft. Make sure that about 1/2" of the tape extends beyond the butt end of the shaft. Peel off the top liner of the tape and carefully wrap the tape around the shaft, making sure it does not wrinkle. Twist the 1/2" of the tape extending beyond the shaft and push it into the butt end of the shaft.


*A HOOKED KNIFE BLADE IS RECOMMENDED FOR GRIP REMOVAL FROM GRAPHITE SHAFTS TO PREVENT DAMAGE. HOOKED KNIVES ARE SOLD SEPARATELY.

STEP 5 LUBRICATING THE GRIP TAPE

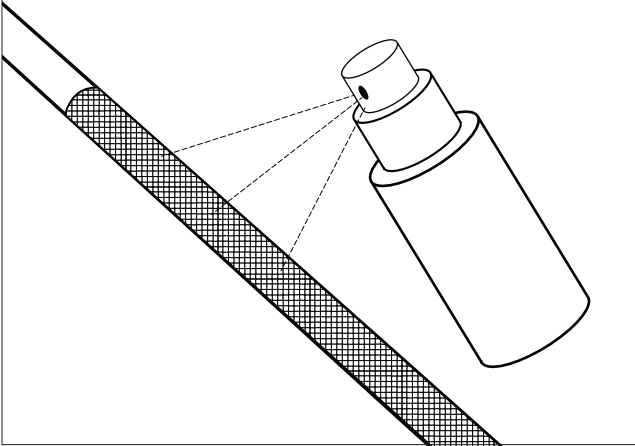


Lubricate the tape. At this time you may want a paint tray underneath the taped area of the shaft to collect excess solvent. Depress the pump on the spray bottle several times to mist the solvent onto the tape along its entire length. The wetter the tape is, the easier it will be for installation of the grip.

STEP 6 LUBRICATING THE GRIP

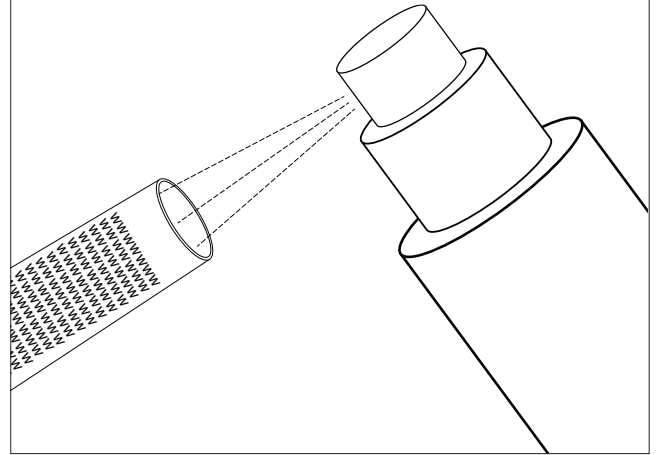


Lightly lubricate the grip. Mist the solvent a few times inside the mouth of the grip.

STEP 7 INSTALLING THE GRIP

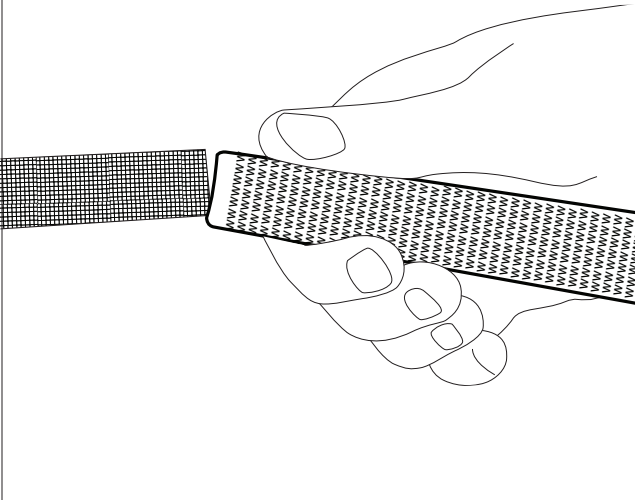

Slide the grip onto the shaft. Immediately slide the mouth of the grip over the shaft butt and push the grip all the way onto the shaft. Wipe away any tape residue from the shaft.

STEP 8 ALIGNING THE GRIP

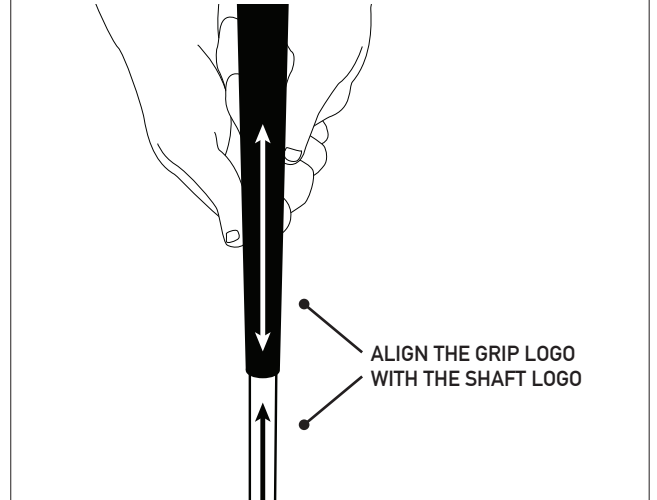

Align the grip. With the club still in the vise, align the grip by twisting it until the pattern on the grip is straight and aligned upward. Immediately remove the club from the vise while the tape is still wet and place the club down with it resting in the playing position. Perform any final grip alignment at this time. Set the club aside to dry.